



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 20 SEP 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 8 September 2004

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)




## Patents Form 1/77

Patents Act 1977  
(Rule 16)

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form).

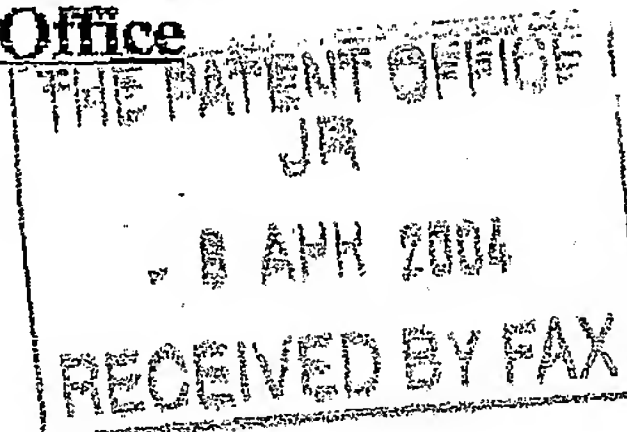The  
Patent  
Office



08APR04 E887691-1 D02824  
P01/7700 0.00-0408044.6 ACCOUNT CHA

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## 1. Your Reference

P.7348 GBA

## 2. Patent application number

(The Patent Office will fill in this part)

0408044.6

## 3. Full name, address and postcode of the or of each applicant (underline all surnames)

COMPOSITE METAL TECHNOLOGY LTD  
Griffith Building (A7)  
Cody Technology Park  
Farnborough  
Hampshire GU14 0LX  
G.B.

Patents ADP number (if you know it)

6392088003

If the applicant is a corporate body, give the country/state of its incorporation

G.B.

## 4. Title of the invention

LIQUID PRESSURE FORMING

## 5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

MAGUIRE BOSS  
5 Crown Street  
St. Ives  
Cambridgeshire  
PE27 5EB, G.B.

Patents ADP number (if you know it)

07188725001

## 6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last six months

Country

Priority application number  
(if you know it)

Date of filing  
(day/month/year)

## 7. Divisionals etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier application

Date of filing  
(day/month/year)

## 8. Is a Patents Form 7/77 (Statement of Inventorship and of right to grant of a patent) required in support of this request?

Yes

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body;
- Otherwise answer NO (See note d)

Patents Form 1/77



## Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description	14
Claims(s)	4
Abstract	
Drawing(s)	4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

MAGUIRE BOSS

Date: 08.04.04

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

P.J. EVENS

Tel: 01480 301588

e-Mail: patenis@maguires.co.uk

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'YES' in part 8, Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

0100416 08-Apr-04 03:42

Patents Form 1/77



1

5

TITLE: LIQUID PRESSURE FORMING

10

DESCRIPTION

15 The present invention relates to a method of pressure forming a metal matrix composite, apparatus therefor, and also to a novel die for use in pressure forming metal matrix composites.

20 Metal matrix composites (MMCs) are composed of a metal matrix and a reinforcement, or filler material, which confers excellent mechanical performance, and can be classified according to whether the reinforcement is continuous (monofilament or multifilament) or discontinuous (particle, whisker, short fibre or other). The principal 25 matrix materials for MMCs are aluminium and its alloys. To a lesser extent, magnesium and titanium are also used, and for several specialised applications a copper, zinc or lead matrix may be employed. MMCs with discontinuous



reinforcements are usually less expensive to produce than continuous fibre reinforced MMCs, although this benefit is normally offset by their inferior mechanical properties. Consequently, continuous fibre reinforced MMCs are generally accepted as offering the ultimate in terms of mechanical properties and commercial potential.

A basic process for casting fibre reinforced metals is described in U.K. patent specification GB 2115327. As a licensee under the patent, the present applicant developed the basic process into a full scale liquid pressure forming (LPF) process. In the LPF process, a pre-heated preform (fibres, short fibres, porous media or particulate) is placed in a heated die, which is closed and locked using a mechanical toggle system. The die and molten metal in a crucible housed in a pressure vessel are then subjected to a high vacuum. When the evacuation is complete, molten metal is transferred from the crucible into the die through a sprue fed by a riser tube by the introduction of nitrogen gas into the pressure vessel. The molten metal takes up the shape of the die, which can be complex, and largely infiltrates the preform. Once the die is filled with molten metal, a hydraulic compaction piston is used to seal the top of the riser tube and further consolidate the casting to encourage maximum infiltration of the preform and to consolidate the shrinking matrix during metal solidification. The resulting composite is then ejected from the die.

According to leading authorities in the field of



materials' science, the LPF process is one of the most efficient and cost-effective methods of manufacturing MMCs, and represents a significance technological advance in the commercialisation of these composite materials. In particular, achieving total cycle times in the range 2 to 5 minutes is one of many significant advantages over other fabrication routes for MMCs. Nevertheless, the present applicants have sought to improve upon the LPF process to promote commercial viability.

10 In accordance with a first aspect of the present invention, there is provided a method of pressure forming a metal matrix composite, comprising: placing a fibre preform into a die cavity; introducing molten metal into the die cavity through a sprue to envelope the fibre preform;  
15 sealing the sprue; applying pressure to molten metal in the die cavity with a mechanical compaction piston to encourage infiltration of the fibre preform; characterised in that the mechanical compaction piston is configured to apply pressure direct to molten metal in the die cavity during  
20 solidification.

During the process, pressure is applied direct to a body of liquid metal within the die cavity which will remain liquid until after other molten metal in the die cavity has solidified. The die may even be configured so  
25 that during solidification a solid/liquid interface migrates towards the body of liquid pressurized by the mechanical compaction piston. For example, the mechanical compaction piston may be configured to act upon the body of

liquid at one end (e.g. top) of the die cavity, and the solid/liquid interface may in use travel from an opposing end (e.g. bottom) of the die cavity towards the other end. In this way, there is no loss of the hydrostatic pressure state experienced by molten metal in the die cavity until solidification is substantially complete, and this improves the degree of metal infiltration into the preform and consolidation in general as compared to results obtained with the LPF process. One reason for this is that, in the LPF process, the hydraulic compaction piston only acted indirectly on molten metal in the die cavity via molten metal in the sprue. Premature or early solidification of molten metal in the sprue resulted in a loss of the hydrostatic pressure state experienced in the die cavity, limiting the effectiveness of the compaction piston. This is not the case with the present invention where pressure is applied independently of the sprue.

The mechanical compaction piston may be configured to travel towards the die cavity (e.g. a central part of the die cavity) when applying pressure to molten metal in the die cavity. The mechanical compaction piston may even project into the die cavity during solidification of molten metal therein. In this way, molten metal inside the die cavity may be mechanically displaced by the mechanical compaction piston when applying pressure to the molten metal. The mechanical compaction piston may apply pressures in excess of 150 bar ( $15 \text{ N/mm}^2$ ), perhaps in the range 400 to 2500 bar (for example 1500 bar) to molten

metal in the die cavity during preform infiltration and subsequent solidification. The mechanical compaction piston may be mounted on a moving platen to which one part of the die is attached. Advantageously, the mechanical compaction piston may also be configured to eject the solidified metal matrix composite from the die cavity once split to facilitate its removal.

The method may further comprise evacuating the die cavity prior to introducing molten metal therein. The method may also comprise depressurizing the molten metal prior to its introduction into the die cavity. Depressurizing may degas the molten metal. Evacuating the die cavity and degassing the molten metal may be performed independently via separate pathways. The molten metal may be introduced into the die cavity under a gas pressure differential or overpressure, for example, caused by inert gas acting on the molten metal in a pressure vessel. The pressure differential may be less than 50 bar, perhaps 10 bar, and may be applied at a controlled rate such that molten metal fills the die in a quiescent (slow and non-turbulent) manner, which may confer improved properties in the solidified component.

In one embodiment, the sprue may be sealed using a sliding valve member. The sliding valve member may be mounted on a piston (e.g. side acting piston) which slides the valve member across the sprue to seal it. The piston may travel transversely to the sprue. Any positive gas pressure on molten metal in the pressure vessel may be

6

removed (e.g. by venting the pressure vessel to atmosphere).

In accordance with another aspect of the present invention, there is provided apparatus for liquid pressure forming a metal matrix component, comprising: a die defining a die cavity for receiving a fibre preform, and a sprue for channelling molten metal into the die cavity; and a mechanical compaction piston configured to apply pressure direct to molten metal in the die cavity during solidification.

The mechanical compaction piston may be configured to travel towards the die cavity when applying pressure to molten metal in the die cavity. The mechanical compaction piston may be configured to project into the die cavity when applying such pressure. Other features of the mechanical compaction may be equivalent to those of the mechanical compaction piston of the first aspect of the invention.

The apparatus may further comprise a pressure vessel for housing molten metal. The pressure vessel may include a furnace for melting metal. The die cavity may be airtight and the die cavity and pressure vessel may have independent pathways for evacuating gas from each. The pressure vessel may have a conduit for channelling molten metal housed therein to the sprue. The conduit may include a riser tube, one end of which is configured to extend into molten metal housed in the pressure vessel.

The die may be a split die and may include electrical

resistance heating. The die may comprise: a first part defining at least part of the die cavity with at least one external opening; and a second part defining a chamber for housing the first part, the chamber having at least one opening which is registrable with the at least one external opening of the first part when housed in the second part. One chamber opening may be configured as the sprue for introducing molten metal into the die cavity of the first part when housed in the second part. The second part may also define part of the die cavity and may be configured to receive the mechanical compaction piston during solidification.

In accordance with yet another aspect of the present invention, there is provided a method of casting a component from a metal having a liquidus temperature, comprising: providing a die comprising: a first part defining at least part of a die cavity with an external opening; and a second part defining a chamber for housing the first part, the chamber having an opening which is registrable with the external opening of the first part when housed in the second part; heating the first part of the die to a temperature above the liquidus temperature of the metal whilst maintaining the second part of the die at a temperature below the liquidus temperature of the metal; placing the first part of the die in the chamber of the second part with the chamber opening registered with the external opening of the first part; introducing molten metal into the die cavity through the chamber opening; and



solidifying molten metal in the die cavity.

The two-part or duplex die is particularly useful in liquid pressure forming metal matrix components as hereinbefore described where normally high die temperatures have to be maintained to prevent premature solidification of the metal matrix and so avoid incomplete infiltration, poor consolidation and matrix porosity. The metal may further comprise removing the first part of the die from the second part after solidification, and cooling the first part independently of the second part before removing the solidified component. Whilst the first part is cooling independently of the second part, another part corresponding to the first part may be prepared and the above method repeated. In this way, fast casting cycle times are achievable, whilst ensuring cast component quality is not prejudiced by premature stripping from its die.

The first and second parts of the die may each comprise at least two sections so that each part may be split, either to remove the cast component from the first part or to remove the first part from the second part. The sections of one part may be configured to separate in a different direction to sections of the other part, for example, the two directions may be substantially perpendicular. The first part may have a profile which tapers in one or more directions to facilitate release from the second part. The first part may be bi-conical or bi-frustoconical.

When the metal comprises aluminium, the first part of the die may be heated to about 800°C, whilst the second part may be maintained at a temperature of about 300°C to 500°C, say 400°C.

5        Embodiments of the various aspects of the invention will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 illustrates apparatus embodying the present invention for pressure forming a metal matrix composite;

10       Figures 2a-2d illustrate schematically four key stages in pressure forming a metal matrix composite using the apparatus of Figure 1;

Figure 3 illustrates die detail of the apparatus of Figure 1; and

15       Figure 4 illustrates further detail of the die of Figure 3.

Figure 1 illustrates apparatus (10) for pressure forming a metal matrix composite (MMC) according to one embodiment of the present invention. The apparatus (10) 20 comprises a split die (12) defining a die cavity (14) for receiving a fibre preform (not shown) and a sprue (16) for channelling molten metal into the die cavity (14). A mechanical compaction piston (18) is mounted on top moving platen (20) and is configured to apply pressure direct to 25 molten metal in the die cavity (14) during solidification.

The apparatus (10) further comprises a furnace pressure vessel (22) which, in use, houses a crucible (24) containing molten metal (e.g. aluminium). The crucible



10

(24) is heated by heaters (26). In use, one end of a riser tube (28) is positioned in the crucible (24) and submerged beneath the level of molten metal contained therein. The other end of the riser tube (28) is in fluid communication with the sprue (16). A side-acting cut-off piston (30) is provided to block fluid communication between the riser tube (28) and the sprue (16) when required. Facing the cut-off piston (30), a slug ejector piston (32) is provided to eject solidified "slugs" of metal, formed by the cut-off piston (30) blocking fluid communication, which would otherwise become trapped between the riser tube and sprue.

The operation of the apparatus of Figure 1 will now be described with reference to the schematic drawings of Figure 2.

15 Stage 1 includes placing a hot fibre preform (50) into the pre-heated, horizontally-split die cavity (14) of die (12). The die parts (12A,12B) are brought into close proximity (~10mm apart) bellows (13) are closed, and the die cavity (14) and bellows (13) are evacuated down to a 20 pressure of about 25 mbar. At the same time, the pressure vessel (22) - containing a crucible (24) of molten aluminium - is evacuated which acts to degas the melt. The bellows (13) and pressure vessel (22) are evacuated at the same rate to avoid any pressure differential which would 25 otherwise result in metal either splashing in the crucible (24), as air is drawn down the riser tube (28), or flooding of the open die area as metal is drawn up the riser tube under the action of a net positive pressure.

At the beginning of Stage 2, the die parts (12A,12B) are clamped together via typically a 280 tonnes toggle press (34), and low-oxygen, nitrogen gas (52) enters the pressure vessel (22) in a controlled manner. The nitrogen gas in the pressure vessel (22) exerts a positive pressure on the surface of the molten aluminium in the crucible (24), forcing it up the riser tube (28) and through sprue (16). The molten aluminium enters the die cavity (14), preferably in a quiescent manner, and envelopes the fibre preform (50). The pressure of the nitrogen gas is then increased over the next 30 seconds to a maximum of 22 bar to increase molten aluminium infiltration of the fibre preform.

Stage 3 commences with the cut-off piston (30) sealing the sprue (16) from the riser (28). The nitrogen gas pressure in the pressure vessel (22) is vented to atmosphere, causing residual molten aluminium in riser tube (28) to flow back into the crucible (24). At the same time, the molten aluminium in the die cavity experiences a direct pressure of up to 1500 bar from actuation of the mechanical compaction piston (18). In this way, a high degree of infiltration and consolidation is achieved, even compensating for shrinkage on solidification. The direct pressure is applied for perhaps 20 to 90 seconds, depending on component size. Once the solidified metal matrix component (60) has cooled to a temperature where it has sufficient mechanical integrity, the two parts of the die (12A,12B) are separated and the component ejected by

further actuation of the mechanical compaction piston (18) as shown in Stage 4. During the cooling stage, a solidified "slug" of metal is ejected by combined action of the side-acting pistons (30, 32).

5        Figures 1 and 2 illustrate the apparatus and process embodying the present invention with a standard-type split die (12). This may be replaced by the duplex die (100) which is shown in Figure 3 and which embodies another aspect of the present invention. For ease of reference,  
10 features in common between the two arrangements share the same reference number.

The duplex die (100) comprises: a first (inner) part or cassette (102) defining at least part of the die cavity (14) with external openings (104, 106) at opposed ends  
15 thereof; and a second (outer) part (108) defining a chamber (110) for housing the first part (102). The inner part (102) is split lengthwise to allow subsequent removal of cast components, and the outer part (108) is split laterally to allow removal of the inner part (102). The  
20 chamber (110) has an opening (112) which communicates with the lower external opening (104) of the first part (102), and which in use communicates with sprue (16). The chamber (110) also defines a head region (114) of the die cavity (14) which communicates with the upper external opening  
25 (106) of the first part (102), and which accommodates the moving head (116) of the compaction piston (18).

The duplex die (100) would be used to cast aluminium matrix composite components as follows. First, the first

of cassette part (102) containing the fibre preform (50) would be heated to a temperature of about 800°C (above the liquidus temperature of the aluminium), whilst the second part (108) would only be heated to about 400°C (below the liquidus temperature of the aluminium). The first part (102) would then be positioned within the chamber (110) of the second part (108) of the die (100) with the apertures (104, 106) registered with the opening (112) and head region (114) respectively. Next, molten aluminium is introduced through opening (112) under gas pressure (communicating with or even forming part of sprue (16)) into and through the opening (104) in the first part (102). The molten metal envelopes and largely infiltrates the preform (50) as it fills the cavity (14), flowing out of opening (106) into the head region (114). Once the sprue (16) is sealed, the head (116) of compaction piston (18) applies pressure to molten metal in the die cavity (14), and the molten metal is allowed to cool. As soon as the metal has solidified, the inner part (102) of the die is ejected from the outer part (108) by splitting the two halves (108A, 108B) of the latter, and allowed to cool further. During the subsequent cooling stage, the inner part (102) supports the freshly solidified casting, ensuring its integrity is not jeopardised by premature removal from the outer part (108). Once the mechanical integrity of the cast component is established, it is stripped by separating two halves of the first part (102). As shown in Figure 4, the first part (102) tapers towards each end from a median plane (120).

14

Each tapering portion is frusto-conical. The first part (102) is formed in two sections (122A, 122B) which meet in a vertical plane.

CLAIMS

1. A method of pressure forming a metal matrix composite, comprising:
  - placing a fibre preform into a die cavity;
  - 5 introducing molten metal into the die cavity through a sprue to envelope the fibre preform;
  - sealing the sprue;
  - applying pressure to molten metal in the die cavity with a mechanical compaction piston to encourage
  - 10 infiltration of the fibre preform;
  - characterised in that the mechanical compaction piston is configured to apply pressure direct to molten metal in the die cavity during solidification.
2. A method according to claim 1, further comprising
- 15 advancing the mechanical compaction piston towards the die cavity when applying pressure to molten metal in the die cavity.
3. A method according to claim 2, in which the mechanical compaction piston projects into the die cavity when
- 20 applying pressure to molten metal in the die cavity.
4. A method according to any one of the preceding claims, further comprising applying pressures in the range 400 bar to 2500 bar to molten metal in the die cavity during solidification using the mechanical compaction piston.
- 25 5. A method according to any one of the preceding method claims, further comprising ejecting solidified metal matrix composite from the die cavity by actuating the mechanical compaction piston.



6. A method according to any one of the preceding claims, further comprising evacuating the die cavity prior to introducing molten metal therein.
7. A method according to claim 6, further comprising  
5 depressurizing the molten metal prior to its introduction into the die cavity.
8. A method according to claim 7, further comprising evacuating the die cavity and depressurizing the molten metal via separate pathways.
- 10 9. A method according to claim 7 or claim 8, in which molten metal is introduced into the die cavity via a pressure differential between the die cavity and molten metal of less than 50 bar.
10. Apparatus for liquid pressure forming a metal matrix  
15 component, comprising:
- a die defining a die cavity for receiving a fibre preform, and a sprue for channelling molten metal into the die cavity; and
  - a mechanical compaction piston configured to apply  
20 pressure direct to molten metal in the die cavity during solidification.
11. Apparatus according to claim 10, in which the mechanical compaction piston is configured to advance towards the die cavity when applying pressure to molten  
25 metal in the die cavity.
12. Apparatus according to claim 11, in which the mechanical compaction piston is configured to project into the die cavity when applying pressure to molten metal in



the die cavity.

13. Apparatus according to any one of claims 10 to 12, in which the die comprises: a first part defining at least a portion of the die cavity with at least one external opening; and a second part defining a chamber for housing the first part, the chamber having at least one opening which is registrable with the at least one external opening of the first part when housed in the second part.

14. A method of casting a component from a metal having a liquidus temperature, comprising:

providing a die comprising: a first part defining at least part of a die cavity with an external opening; and a second part defining a chamber for housing the first part, the chamber having an opening which is registrable with the external opening of the first part when housed in the second part;

heating the first part of the die to a temperature above the liquidus temperature of the metal whilst maintaining the second part of the die at a temperature below the liquidus temperature of the metal;

placing the first part of the die in the chamber of the second part with the chamber opening registered with the external opening of the first part;

introducing molten metal into the die cavity through the chamber opening; and

solidifying molten metal in the die cavity.

15. A method according to claim 14, further comprising removing the first part of the die from the second part

18

after solidification, and cooling the first part independently of the second part before removing the solidified component from the first part.

1/4


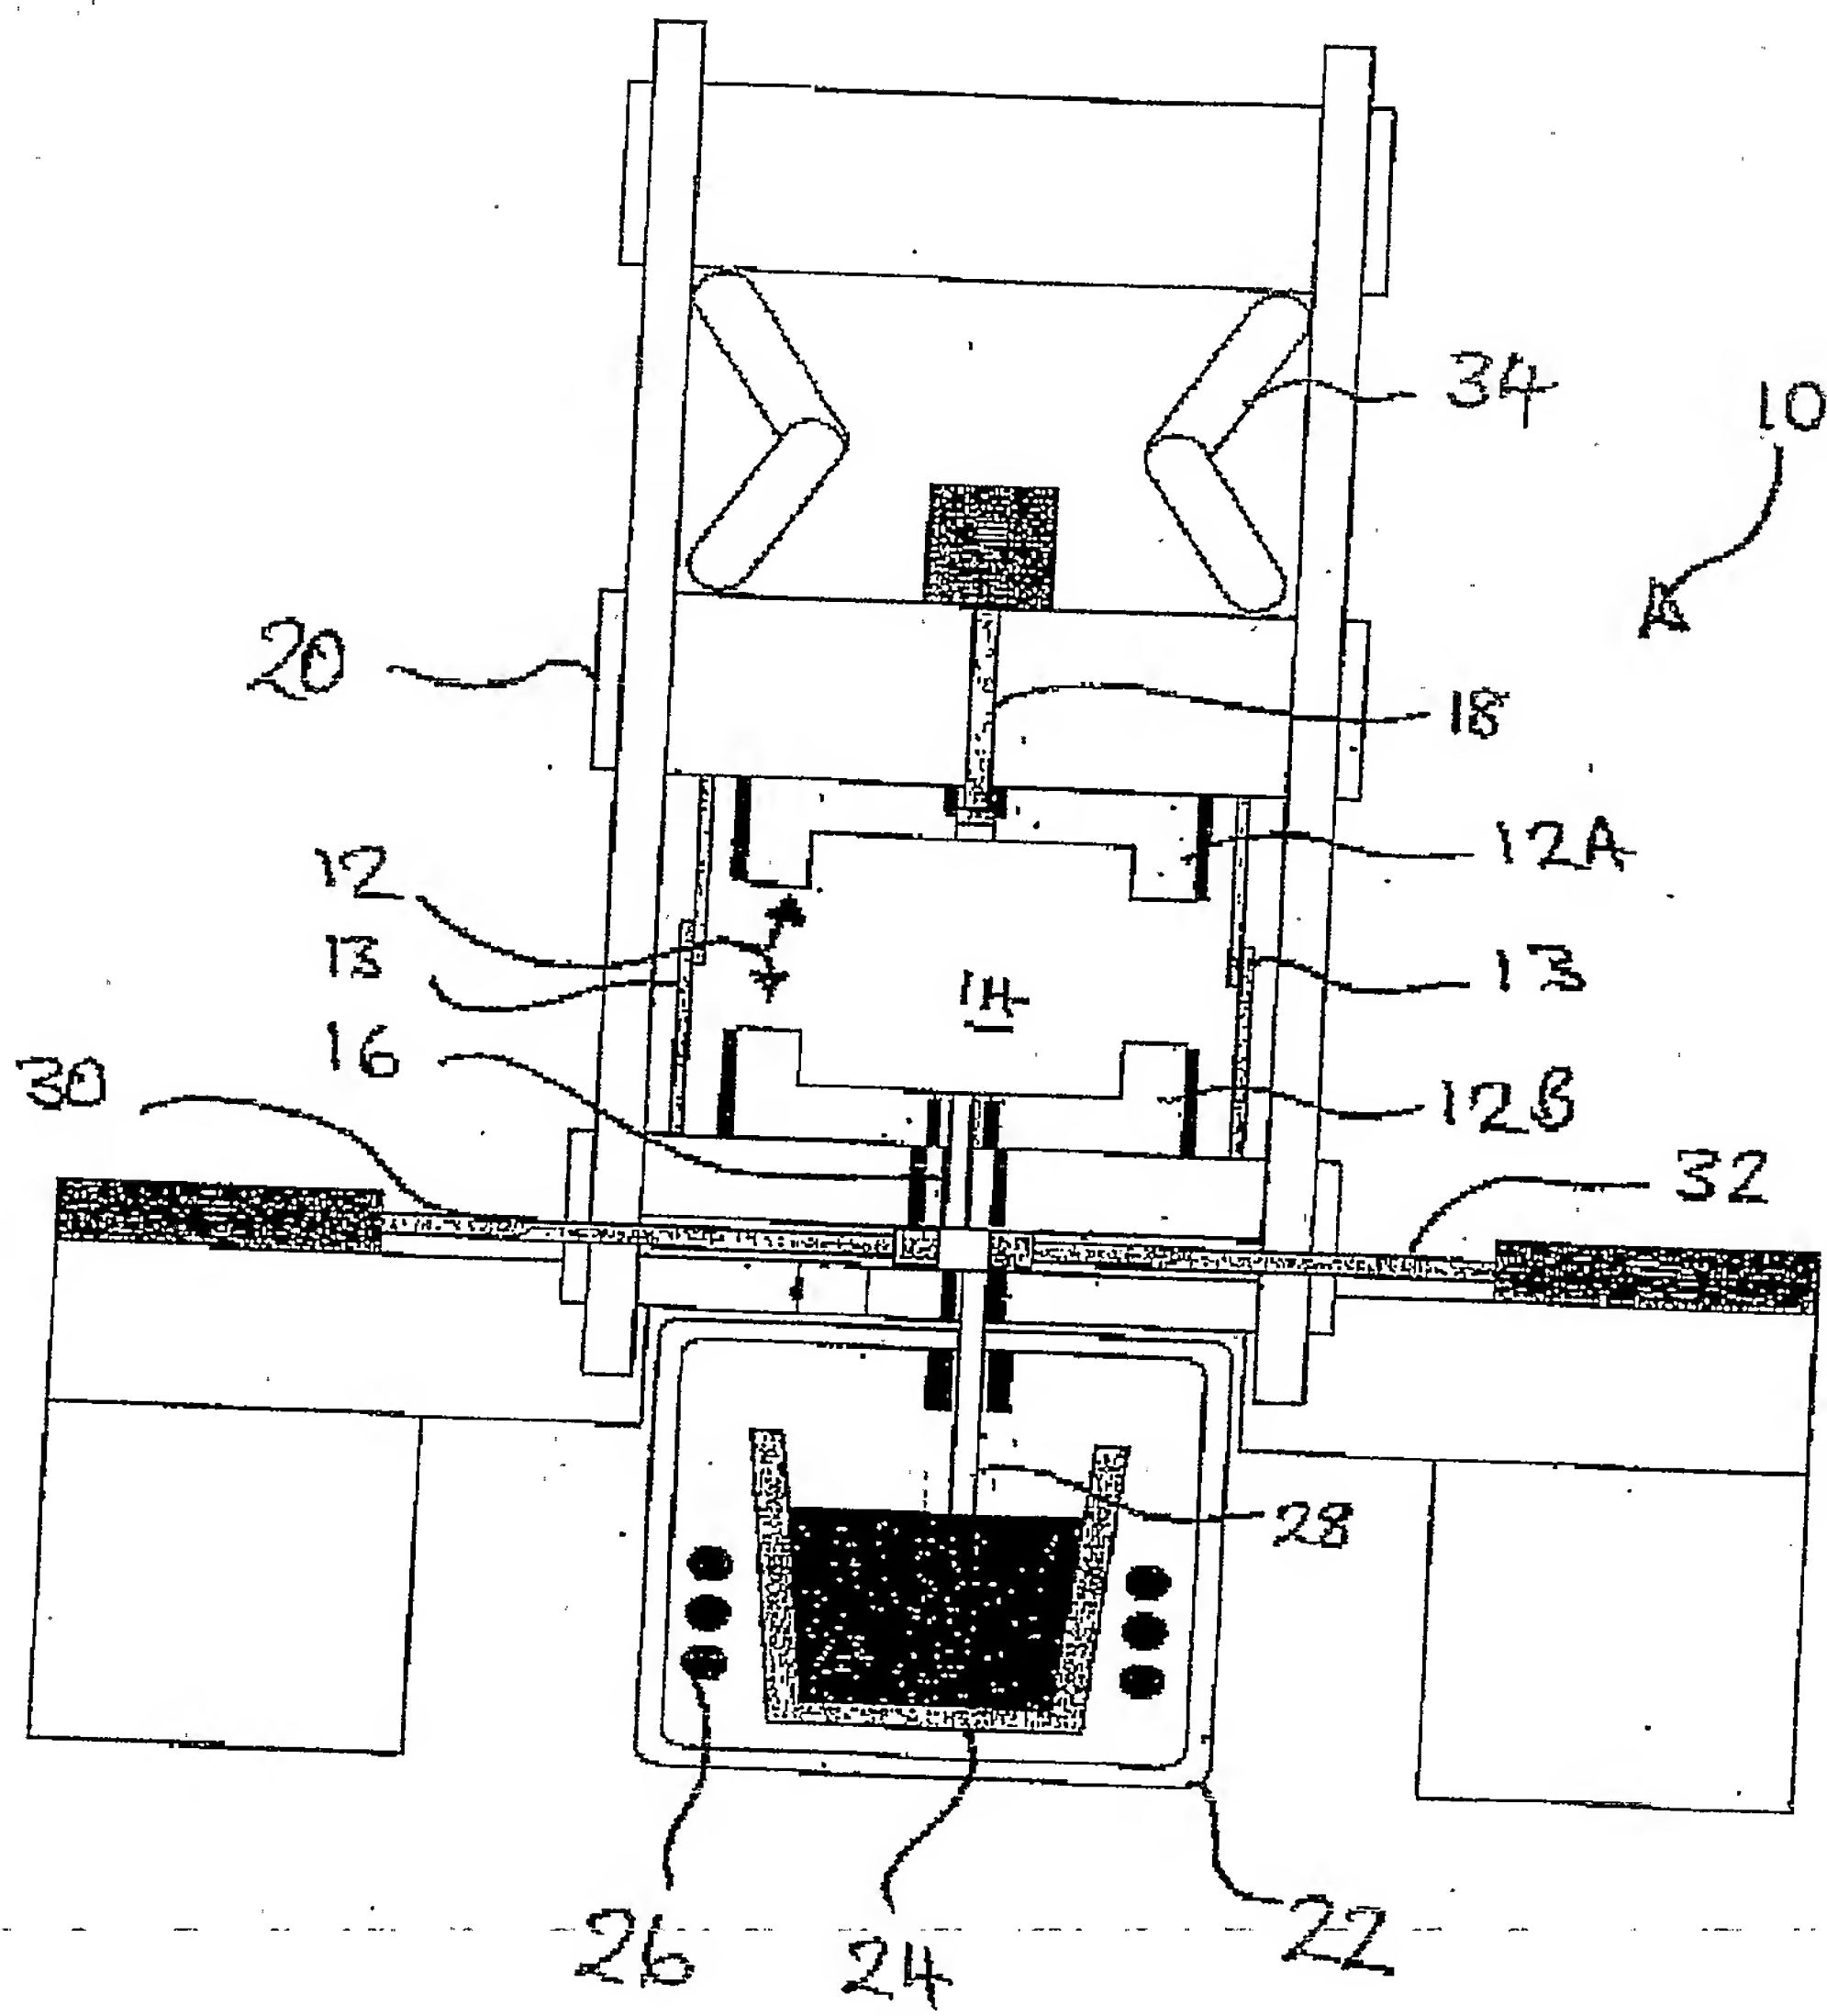


FIGURE 1.



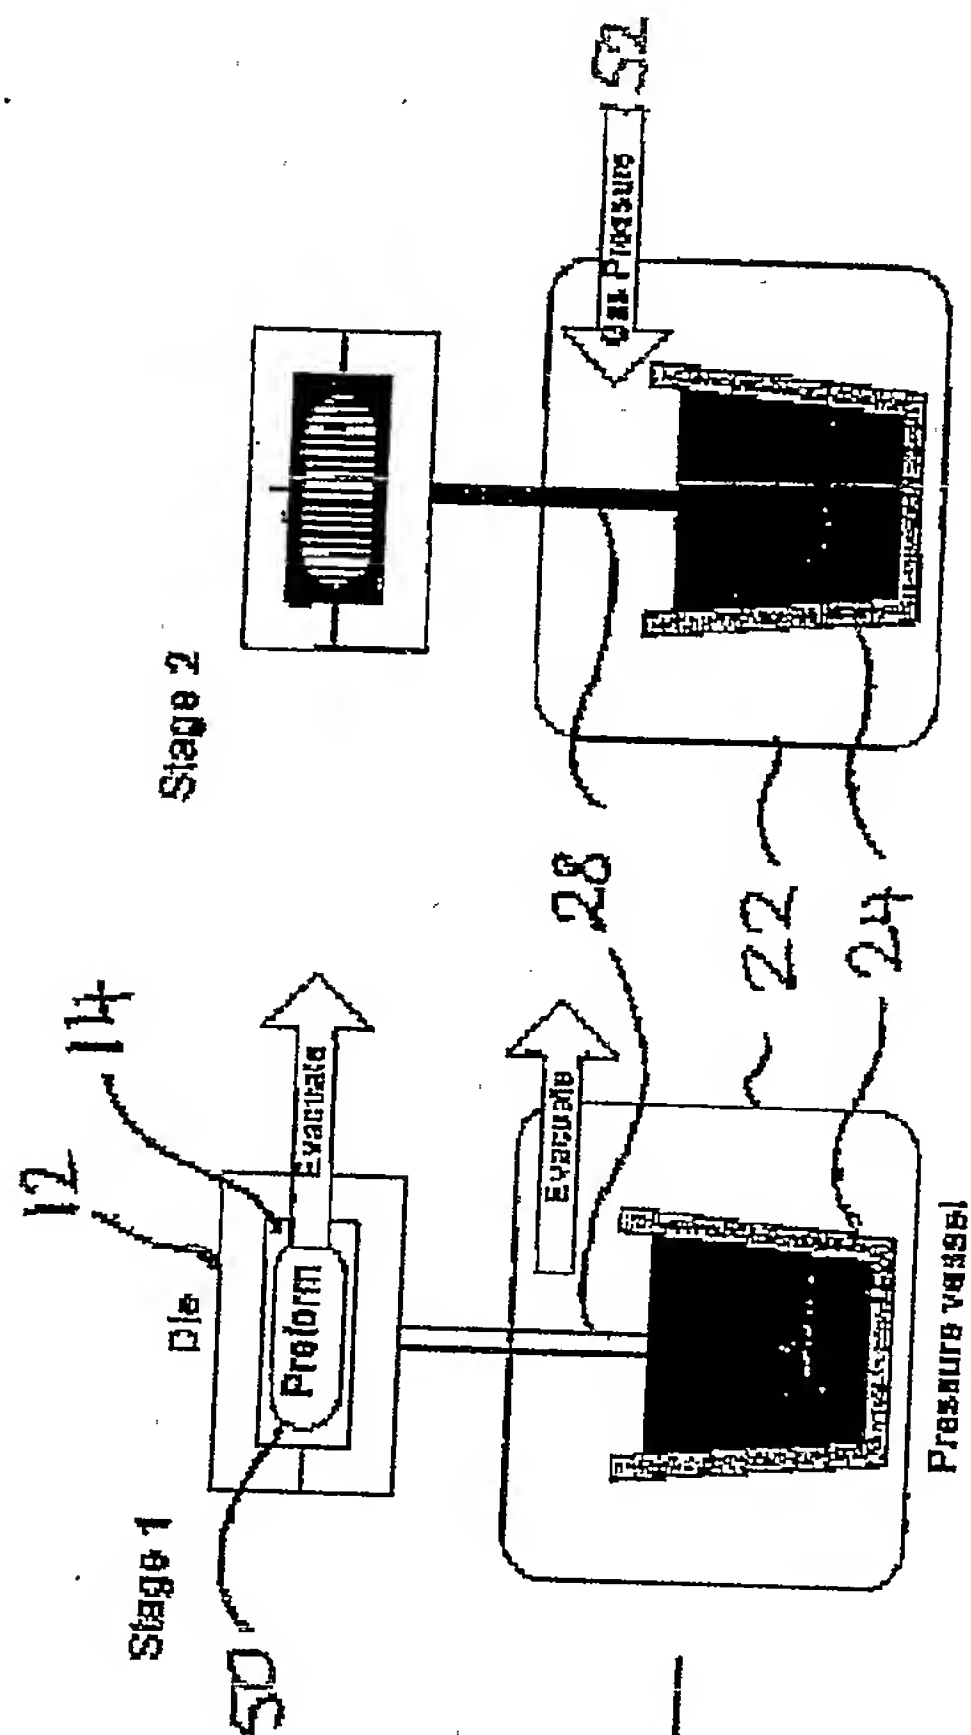


FIGURE 2A

FIGURE 2B

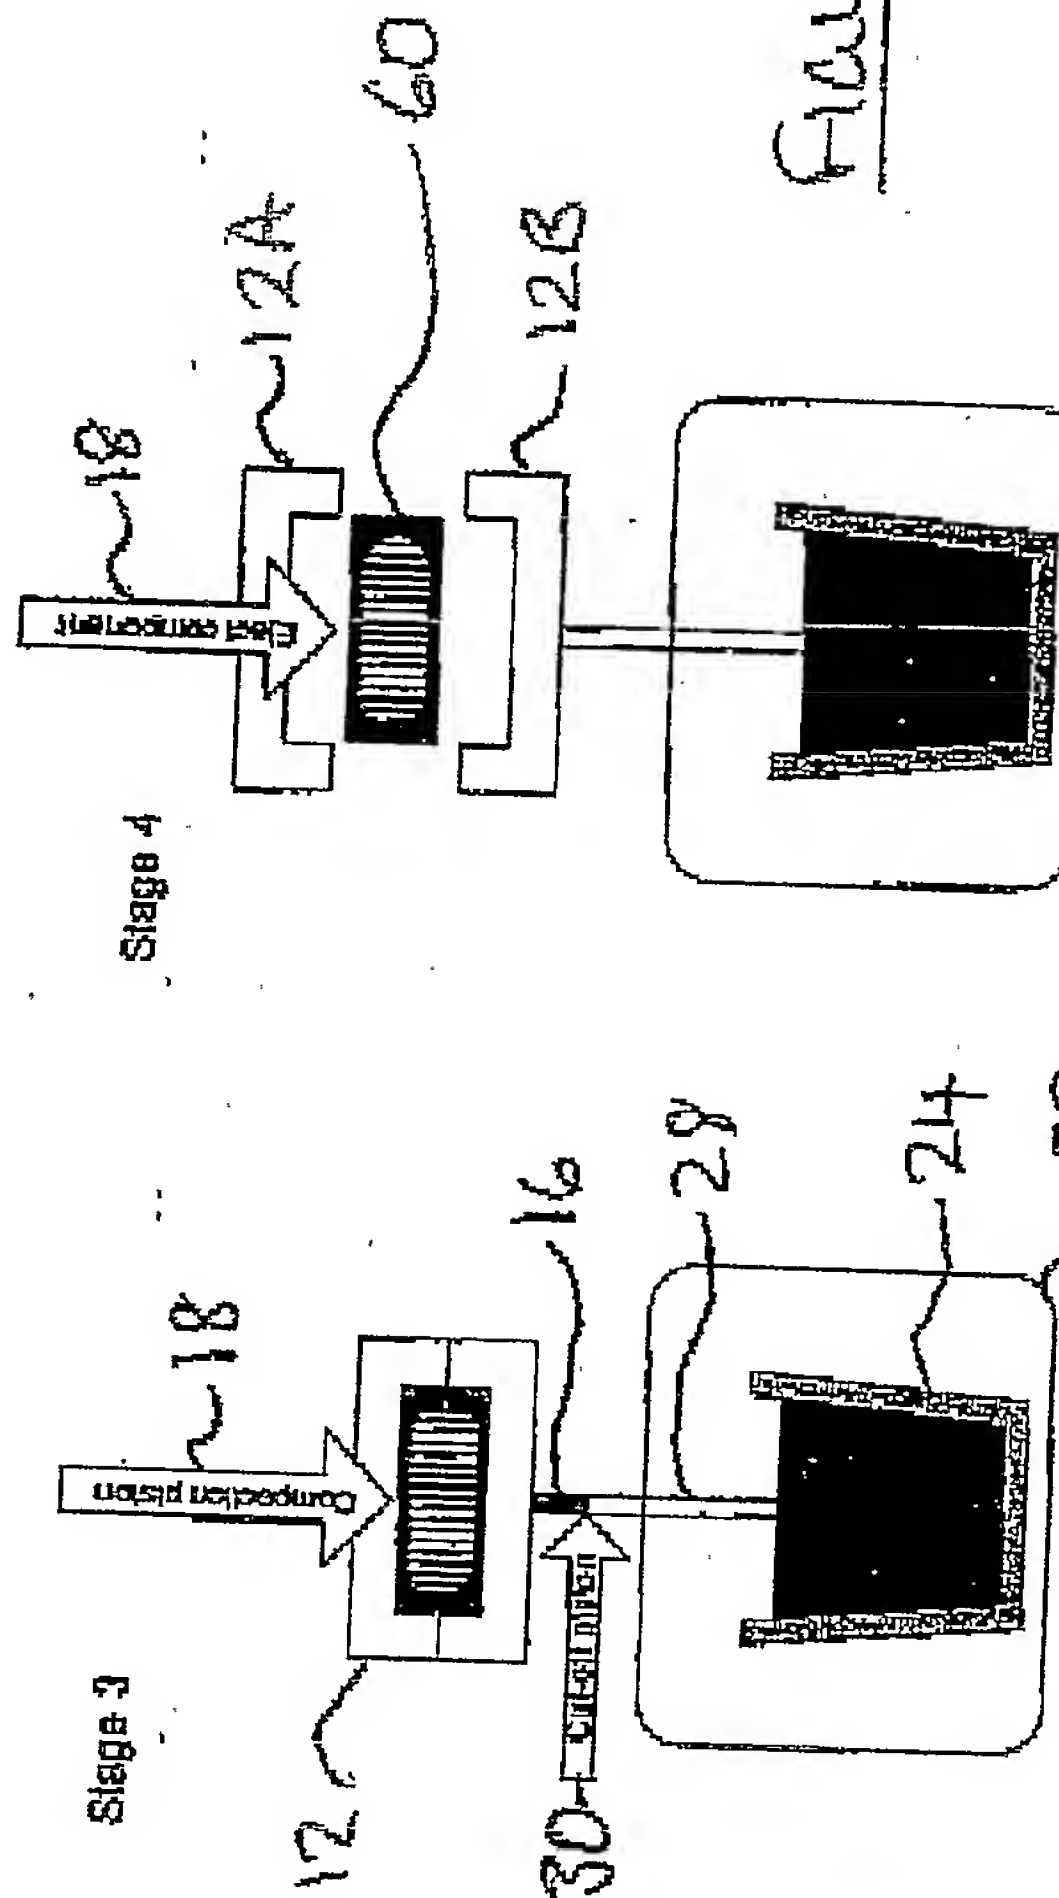


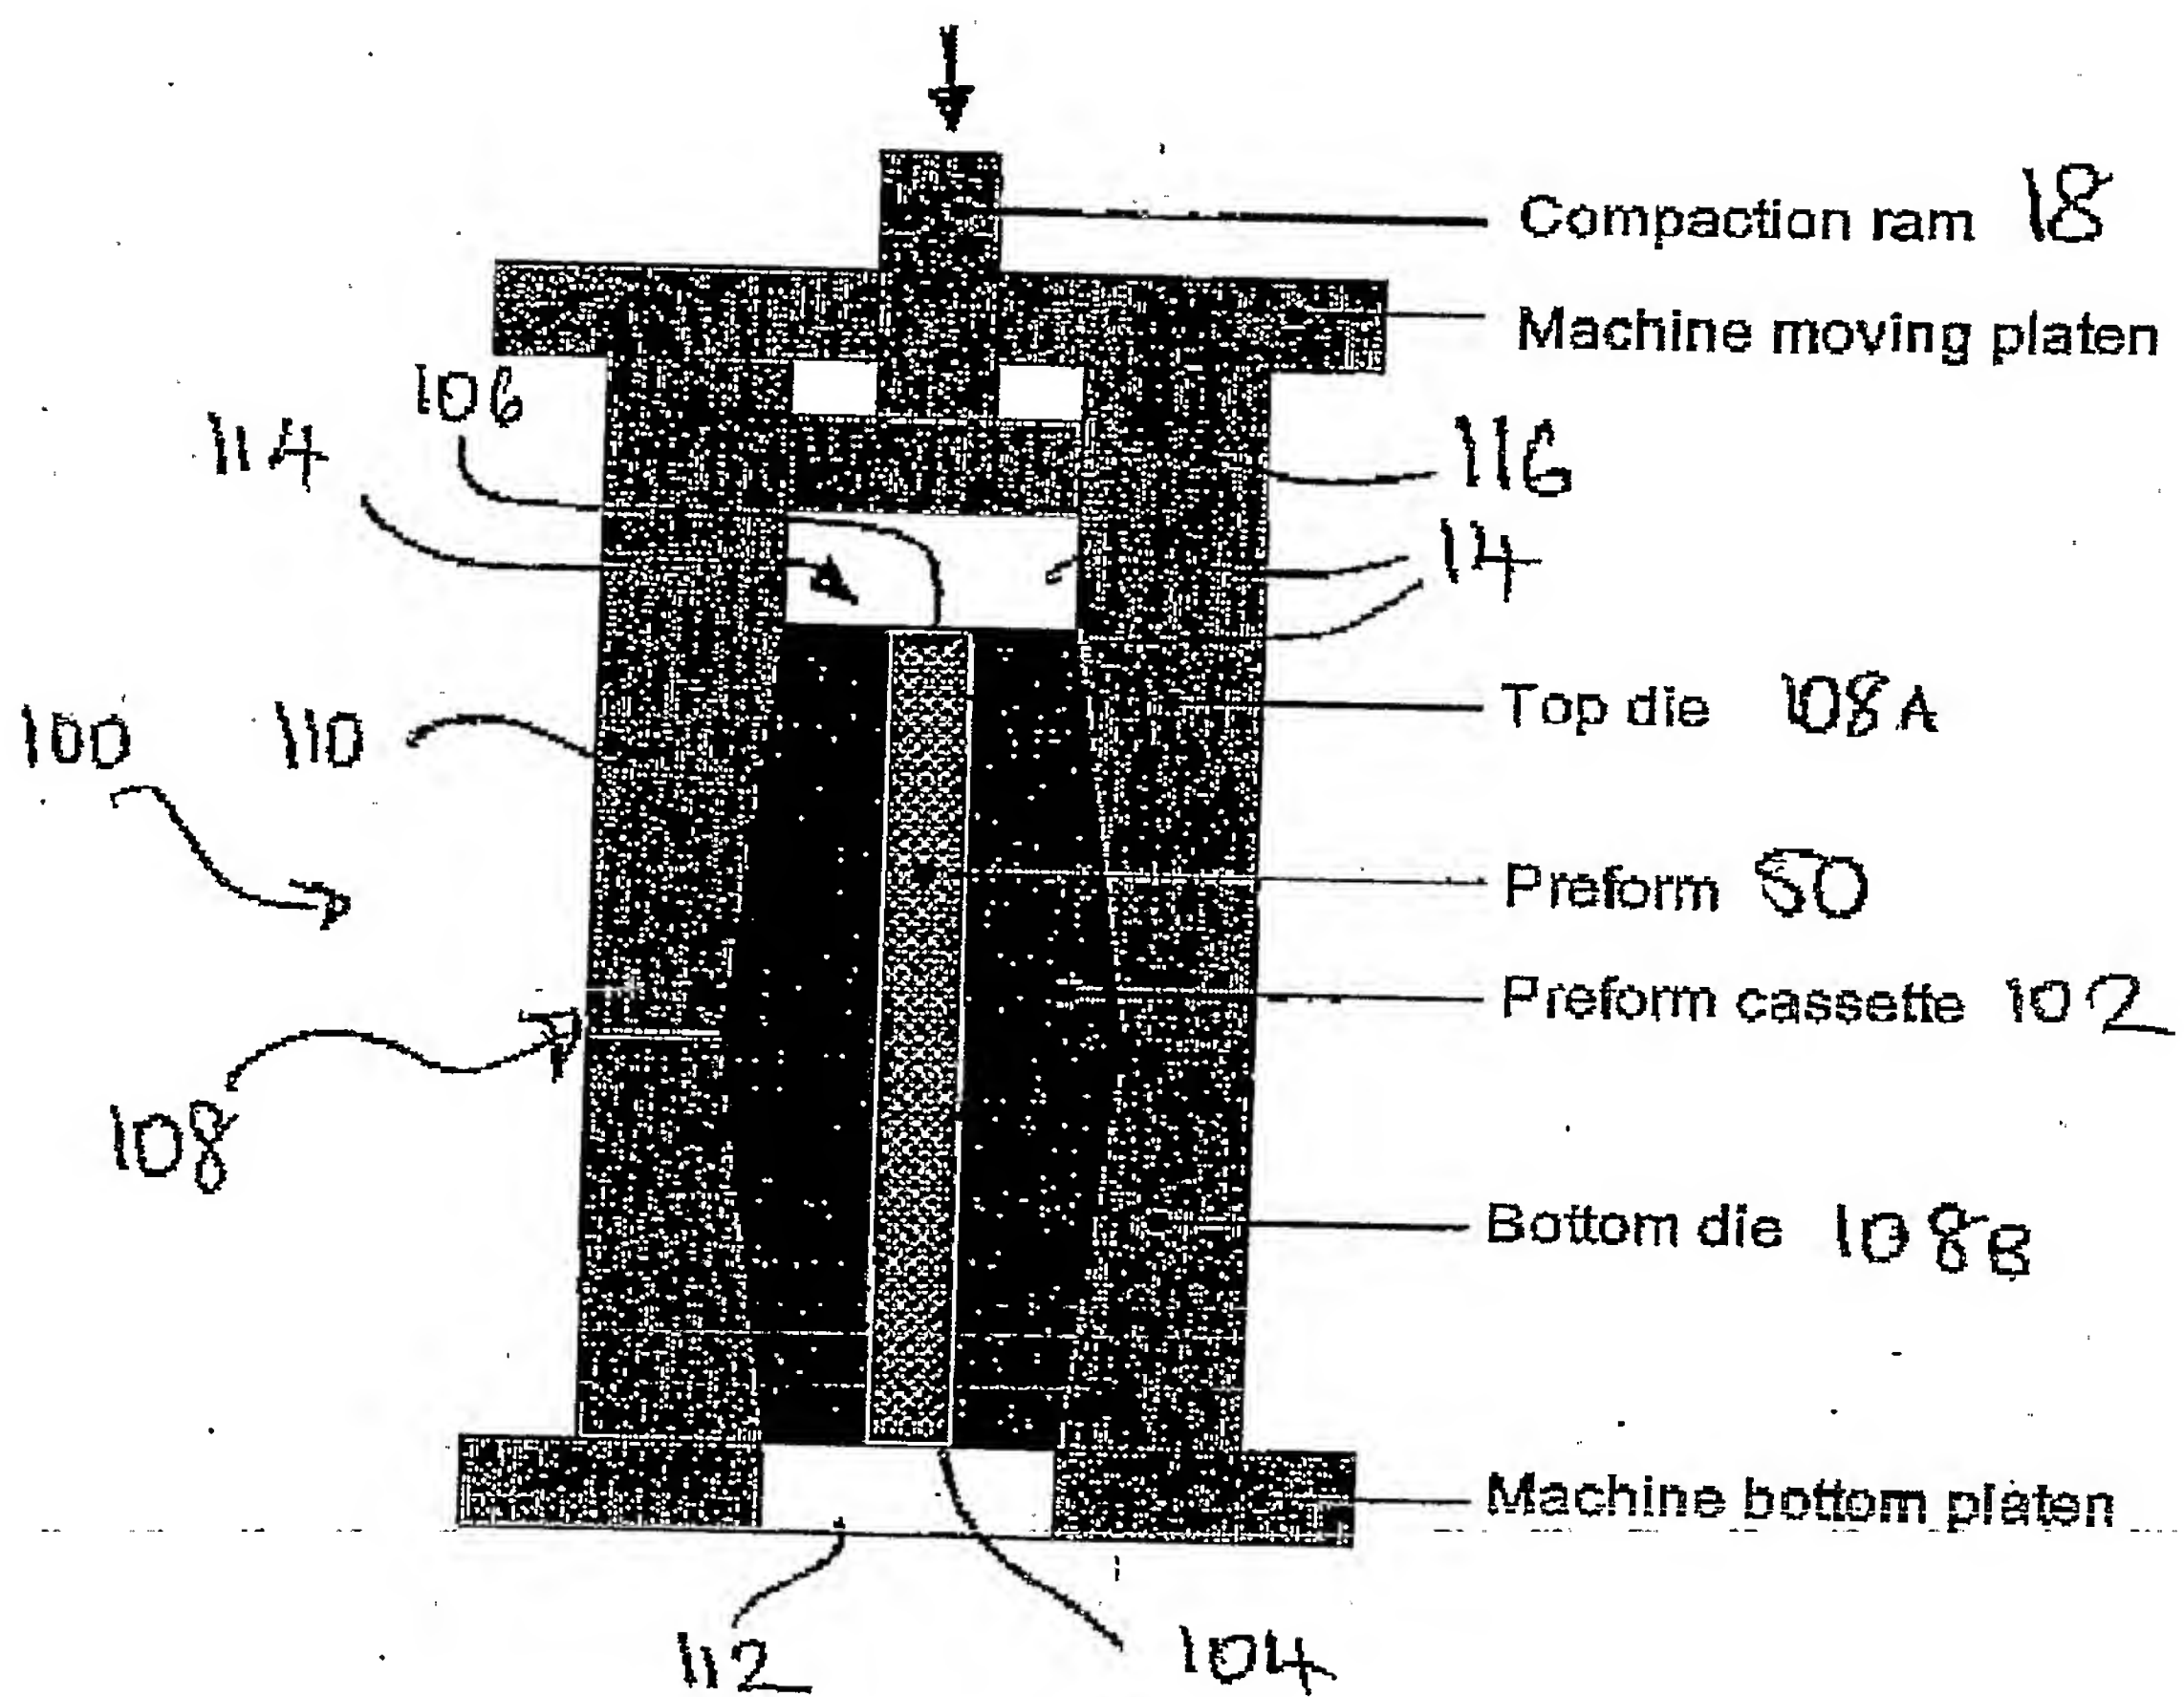
FIGURE 2C

FIGURE 2D

2/4



3/4

FIGURE 3





4/4.

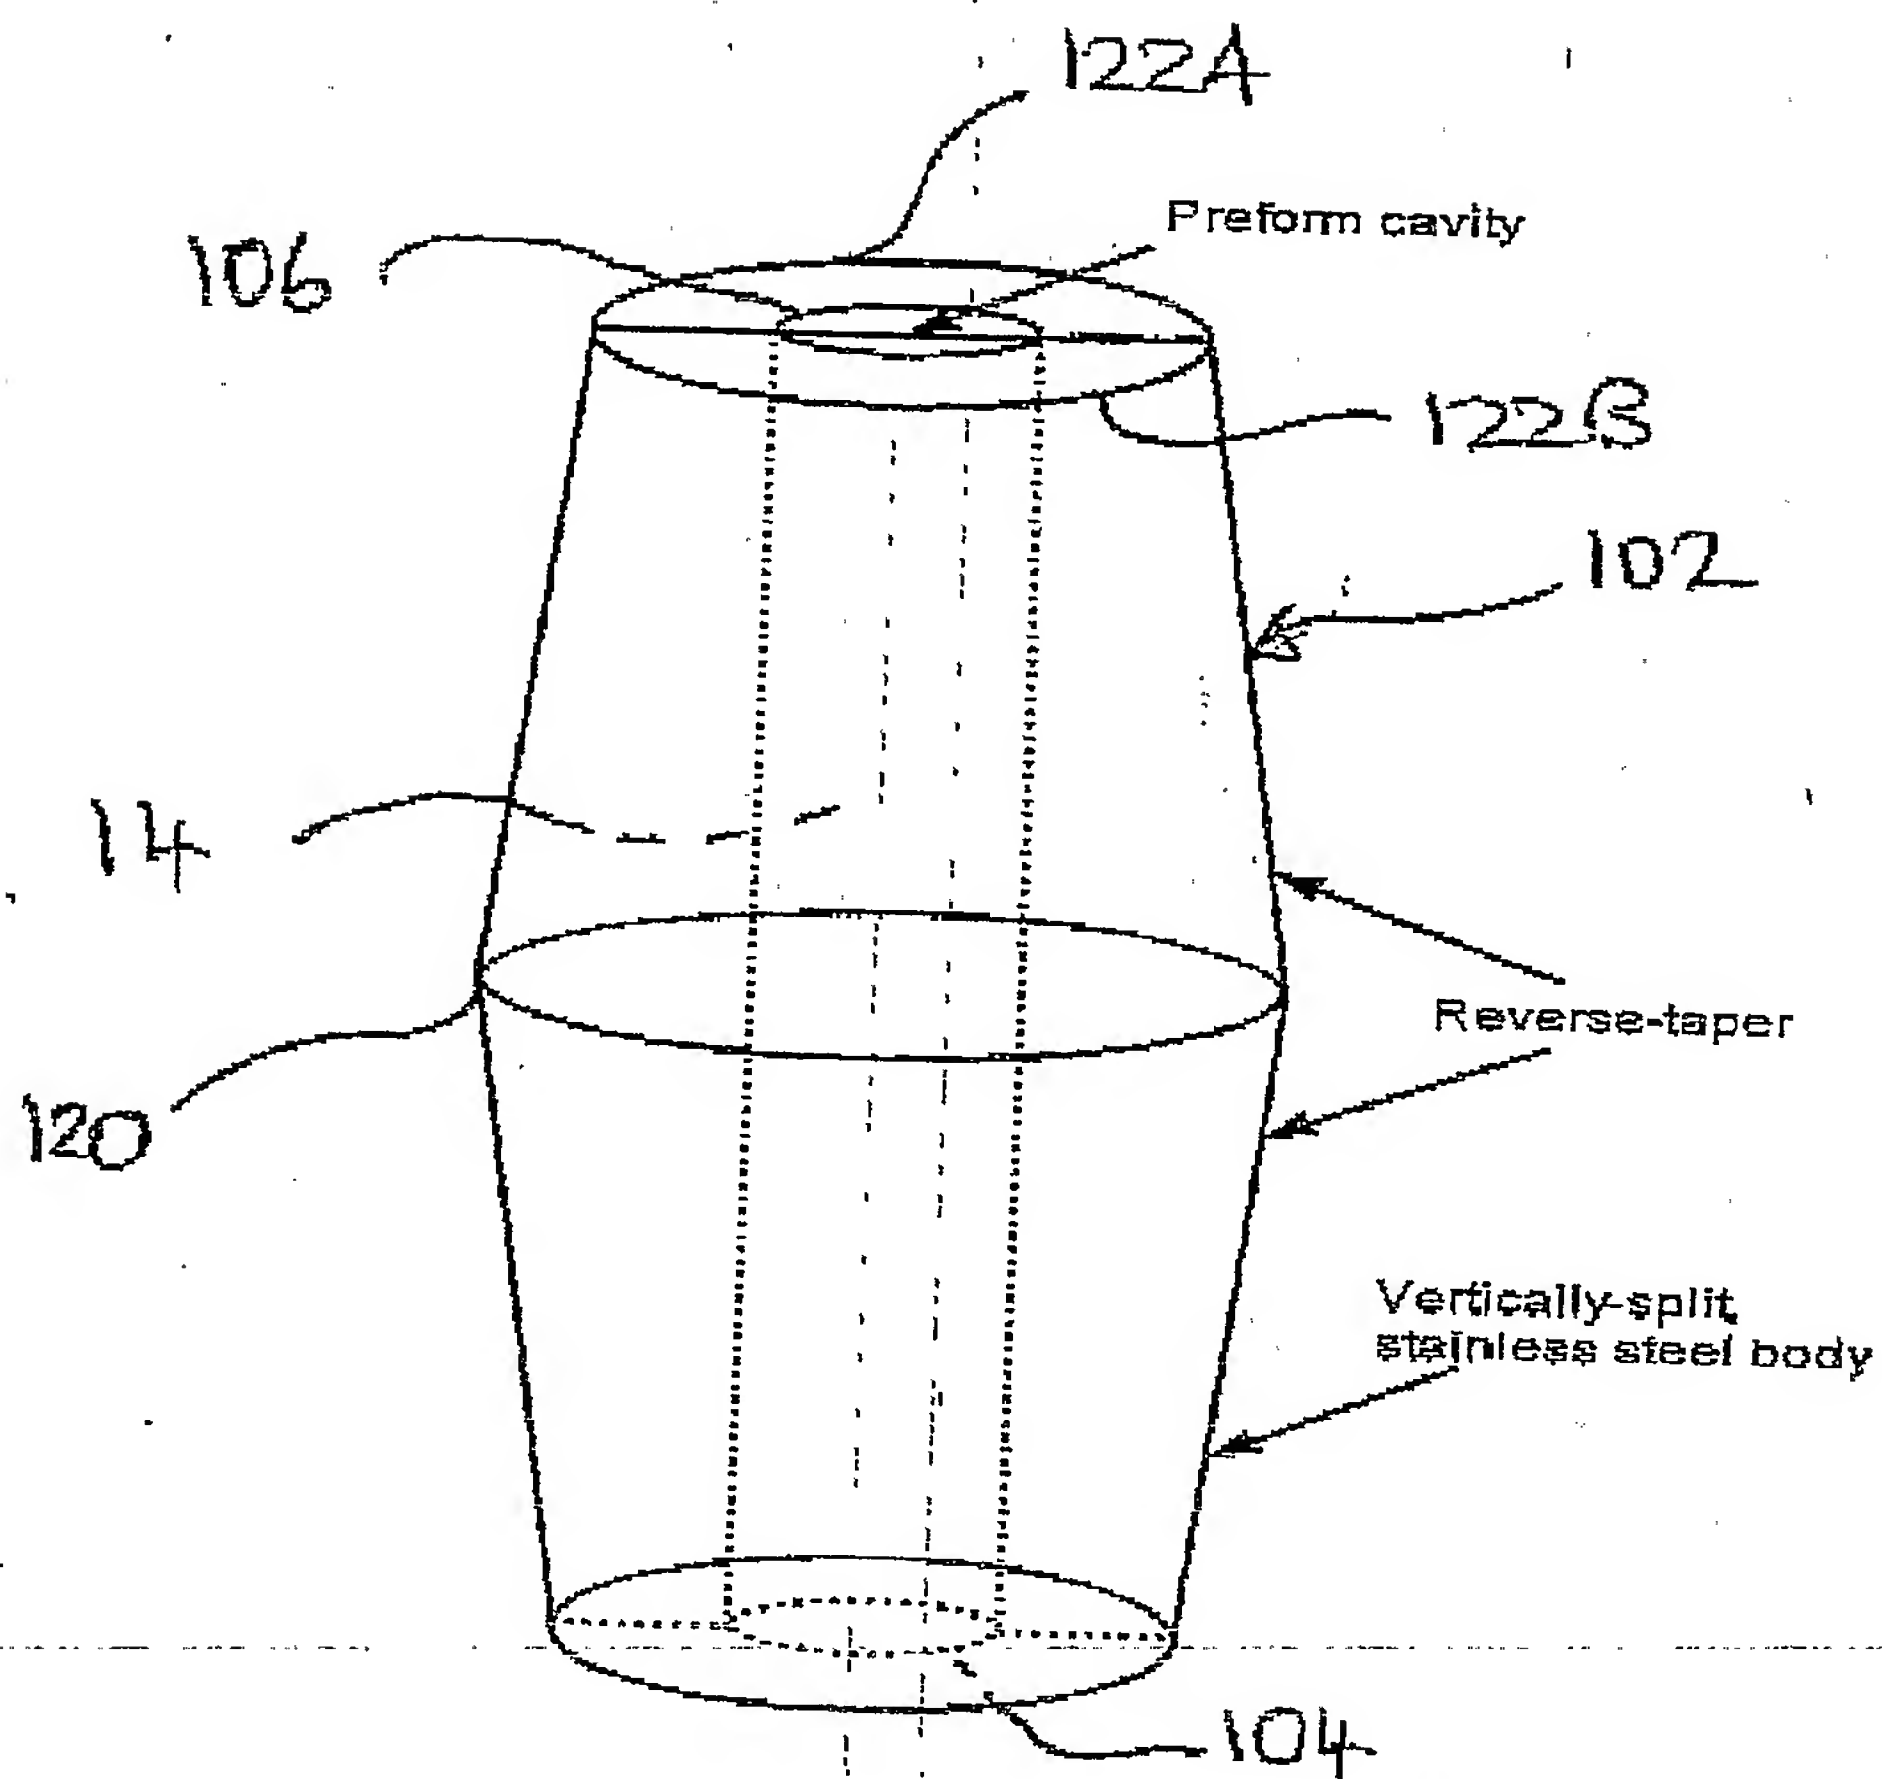


FIGURE 4

PCT/GB2004/003382

matane Boss

13/8/04.

PCT/GB2004/003382

